


Specification

Drawing NO.	AFS-K703-2-B	Ver.0	Rev. 2
Part NO.	AFK703-2-xxM-B	"xx" means the length in meter	
Product Description	7/16MA-4.3/10SM, 1/2" Superflexible Cable	Date: 2019.10.25	
Draft: Wang Ying AFY/E	Checked: Yu Ying AFY/Q	Approved: Xu Yiming AFY/MR	

Part NO.	Length (m)	Attenuation (dB)	Part NO.	Length (m)	Attenuation (dB)
AFK703-2-2M-B	2	900/1800/2600MHz: ≤0.33/0.43/0.53	AFK703-2-10M-B	10	900/1800/2600MHz: ≤1.16/1.65/2.20
AFK703-2-3M-B	3	900/1800/2600MHz: ≤0.33/0.43/0.53	AFK703-2-15M-B	15	900/1800/2600MHz: ≤1.79/2.53/3.20
AFK703-2-6M-B	6	900/1800/2600MHz: ≤0.74/1.03/1.37	AFK703-2-20M-B	20	900/1800/2600MHz: ≤2.32/3.30/4.20

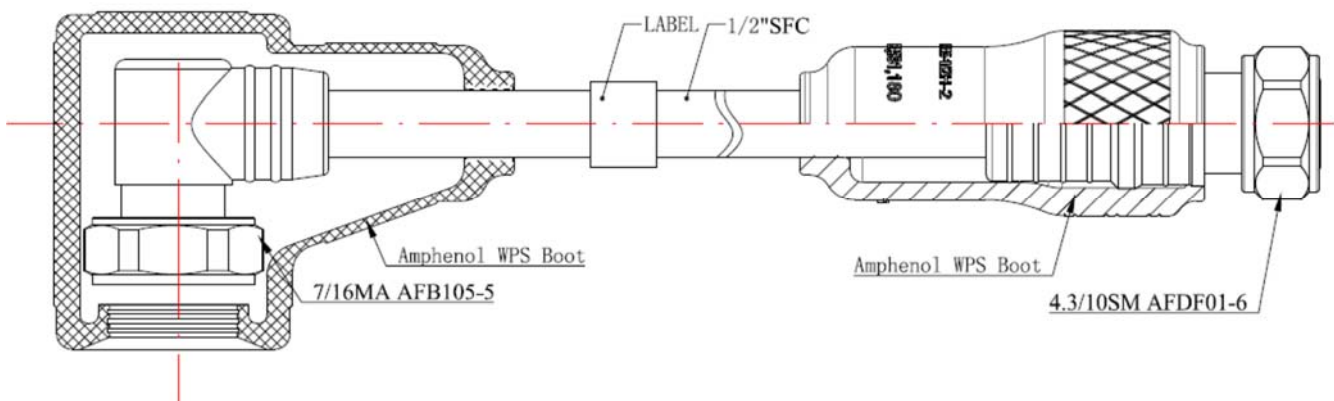

Reference

IEC61169-4(7/16)
IEC61169-54(4.3/10)

Electrical

Nominal Impedance (Ω)	50
Frequency Range (GHz)	DC~8.8
VSWR (dB)	≤1.25(0-3GHz)
Dynamic PIM with IEC 62037 (2*43dBm) (dBc)	≤-163
Connector Insertion Loss (dB)	≤0.05(3GHz)
Insulation Resistance (MΩ)	≥5000
Proof Voltage (V)	1000
Screen Efficiency (dB)	≥110
Max. power range(kW)	≥20.5
Power Rating (W)	400W@3GHz

Mechanical Performance

Nut Torque	25 N*m (7/16) 5 N*m (4.3/10)
Single Minimum Bending Radius	≥25mm
Multiple Minimum Bending Radius	≥35mm
Number of Bends, Minimum	15
Cable Length	L(m)
weight (kg/m)	≤0.22

Material and Plating

Connector Parts		Material	Plating (Standard)
Connector A 7/16	Inner Conductor	Brass	Ag 5μm
	Outer Conductor	Brass	Copper-tin-zinc 2μm
Connector B 4.3/10	Inner Conductor	Bronze	Ag 5μm
	Outer Conductor	Brass	Copper-tin-zinc 2μm
Cable	Inner Conductor	Copper Plated Aluminum	
	Insulation	PE	
	Outer Conductor	Helical Corrugated copper tube	
	Jacket	PE, Contains No Halogen	
Waterproof Boot		Silicone rubber	
Adopt over-Molding			

Environment

UV Resistance	IE-68-2-5
Waterproofing Standard	IP68
Operating Temperature	-40℃~+85℃
Storage Temperature	-40℃~+85℃
Weather Standard	IEC 68 40/ 85/ 21
Thermal Shock	IEC60068-2-14-Na
Vibration	IEC60068-2-6-Fc
Shock	IEC60068-2-27
RoHS	Compliant

Testing & Traceability

100% tested and guaranteed as per manufacturer specification. Traceability of VSWR & PIM test data through serial number on the label